

100-10468-10001

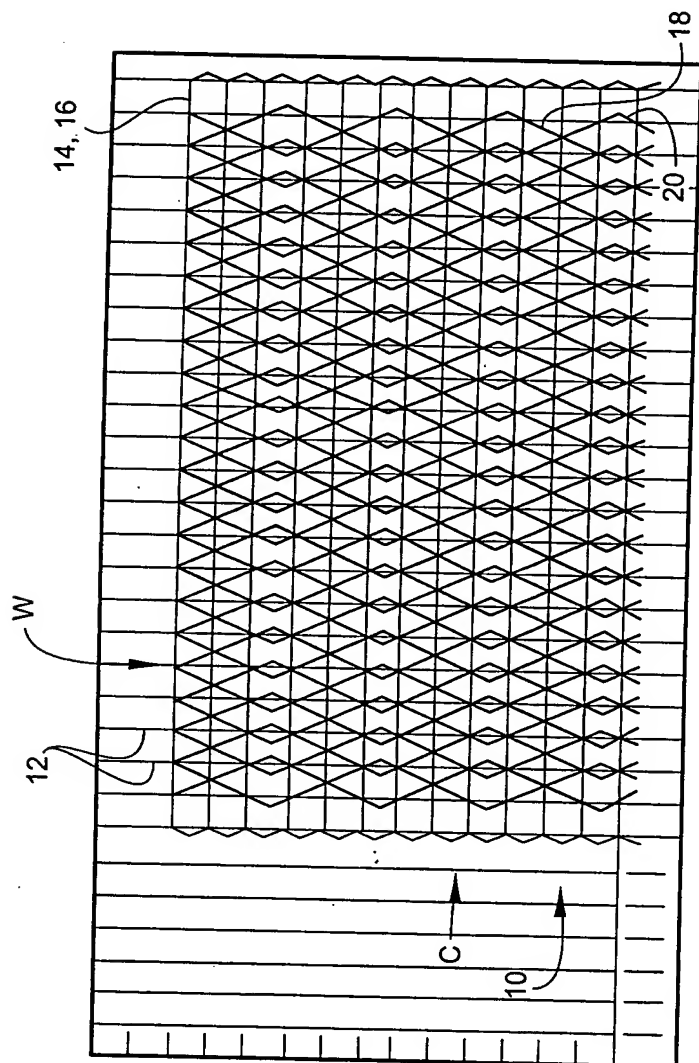


Fig. 1

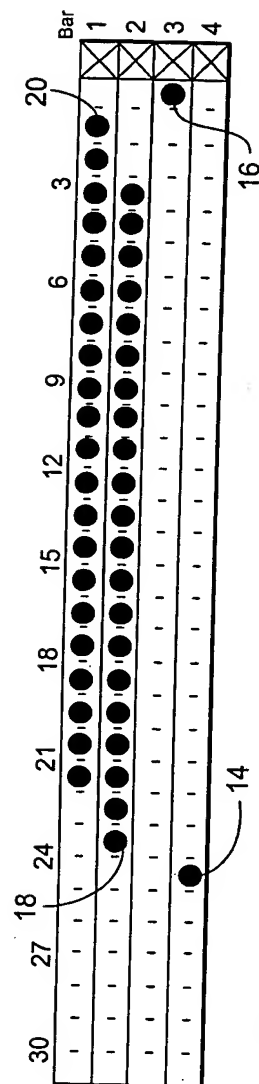


Fig. 2

[illegible]

Fig. 3

FOOT" 8940T00T

Gauge: 14
 Needles: 24
 Thread-guides: 44
 Eyelets: 0
 Bars: 4
 Links: 48

Take-down rollers
 AL.3R
 AL.3RDF/AL.3RS
 AL.POS/C

A: 0 B: 0
 C: 0 D: 0
 E: 0 F: 0
 G: 0 H: 0

Stitches per cm: 30

Elasticity: 0

Elastic threads Type
 Warp threads Type Tuntex Poly

Count
 Count 1/150

Total: 0
 Total: 24

Wef Threads
 Bar 1:
 Bar 2:
 Bar 3:
 Bar 4:

Type
 Tuntex Poly
 Tuntex Poly
 Flat Bright Poly Dillion
 Tuntex Poly

Count
 1/150
 1/150
 1/150/48 100% Poly Bright A.D.
 1/150

Thread-guides
 21
 21
 1
 1

Threads per
 thread-guide
 1
 1
 3
 5

Total
 21
 21
 3
 5

Machine: 407

RPM: 1000

Hourly production rate per band (m): 17.00

Total hourly production (m): 119.00

Needle grooves: 221

Performance coefficient: 0.85

Bands obtainable contemporaneously: 7

Notes

Stitches equals picks. Run bright poly, each end separated in reed.

Fig. 4

1000681

